


GRADE 1 HEAVY DUTY LEVER LOCKSET



ADA compliant

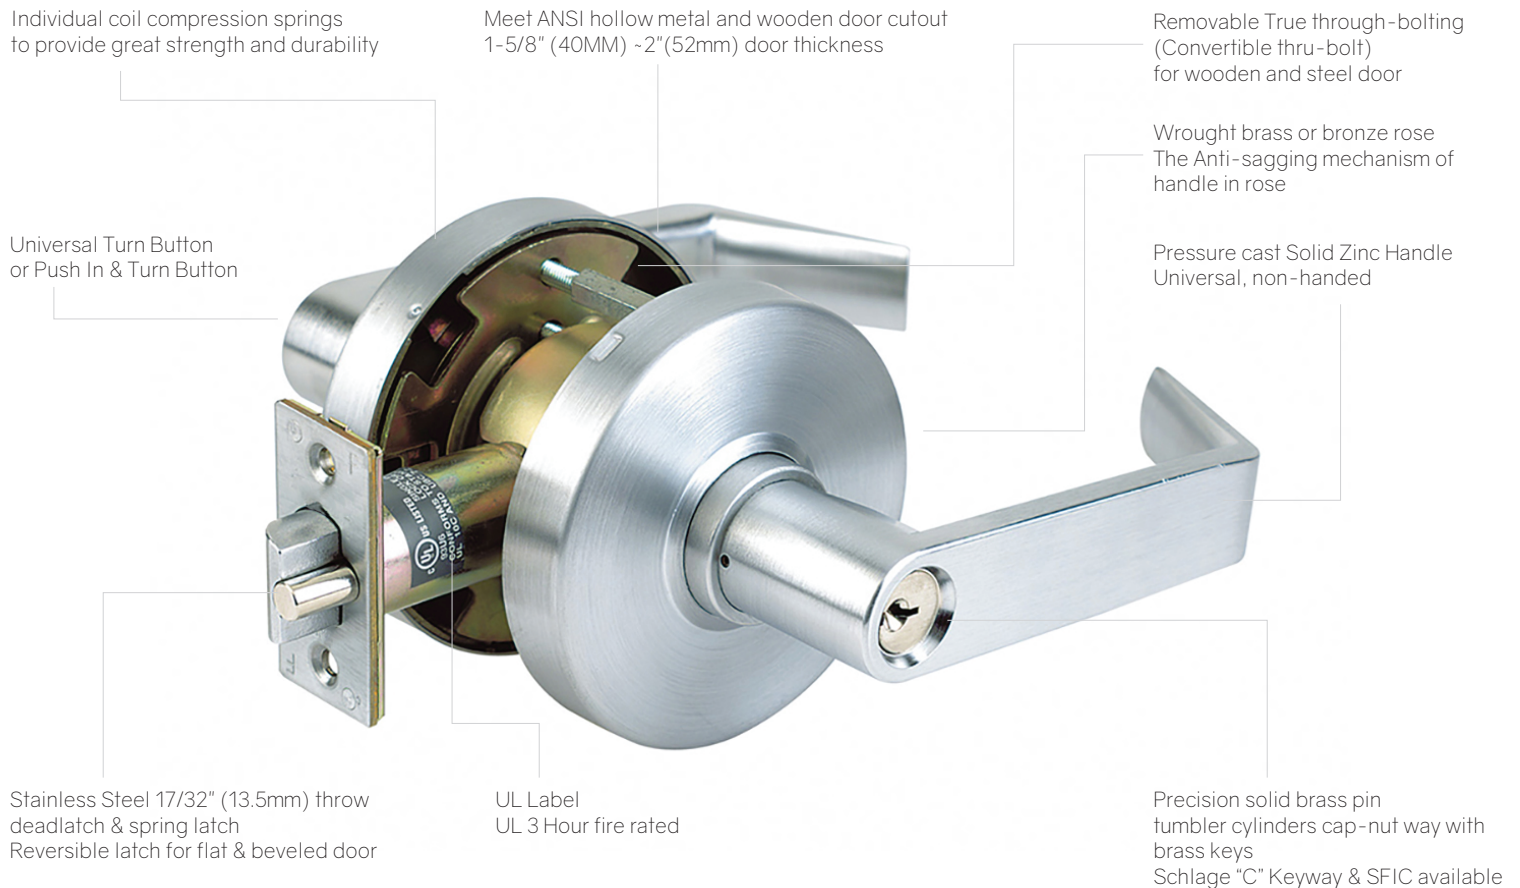

SPECIFICATIONS


- **Certifications:**
 - ANSI/BHMA A156.2 Series 4000, Grade 1 strength, operational and 1,000,000 cycles requirements
 - UL/cUL Listed
 - UL 10C 3 hours fire rating
 - ADA compliant
- **Door Thickness:** 1-5/8" (40mm) to 2" (52mm)
- **Backset:** 2-3/4" (70mm) standard, 2-3/8" (60mm) optional
- **Latch Front:** 1-1/8" (29mm) x 2-1/4" (57mm)
- **Latch Bolt:** Stainless Steel 17/32" (13.5mm) throw
- **Strike:** ANSI (ASA) curved lip strike standard.
- **Cylinder & Keys:** Precision solid brass pin tumbler cylinders with nickel silver brass 2 keys. Schlage "C" keyway and SFIC available
- **Small Format Interchangeable Core** available
- **Limited Warranty:** Seven-year Mechanical
- **Flexibility:**
 - Removable convertible post
 - Free wheeling mechanism
 - Various lever designs available
 - Large selection of functions and finishes available
- **Free wheeling mechanism (clutch):** When the outside lever is locked, it will rotate freely up and down while remaining securely locked.



TECHNICAL DIMENSIONS


Lever Design:

Lever (L)




Rose Design:

Flat Rose (F)



Door Preparation:



HOW TO ORDER

K R O M - 1 1 L F 5 3 C 2 6 D S F I C

KROME
 Grade 1
 Lever Design
 Rose Design
 Function
 Finish
 Option

Item Number	Rose	Function	Finish	Option
11L	Flat (F)	Passage (10) Privacy (40) Entry (53) Classroom (70) Classroom Double (72) Storeroom (80) Storeroom Double (82)	Satin Chrome (C26D)	Clutch (C) Small Format Interchangeable Core (SFIC) available for certain functions

Note: Default Schlage Keyway

SFIC not available for functions 72 and 82