


Unless noted all dimensions  $\pm 0.020"$   
 $\pm 0.5mm$

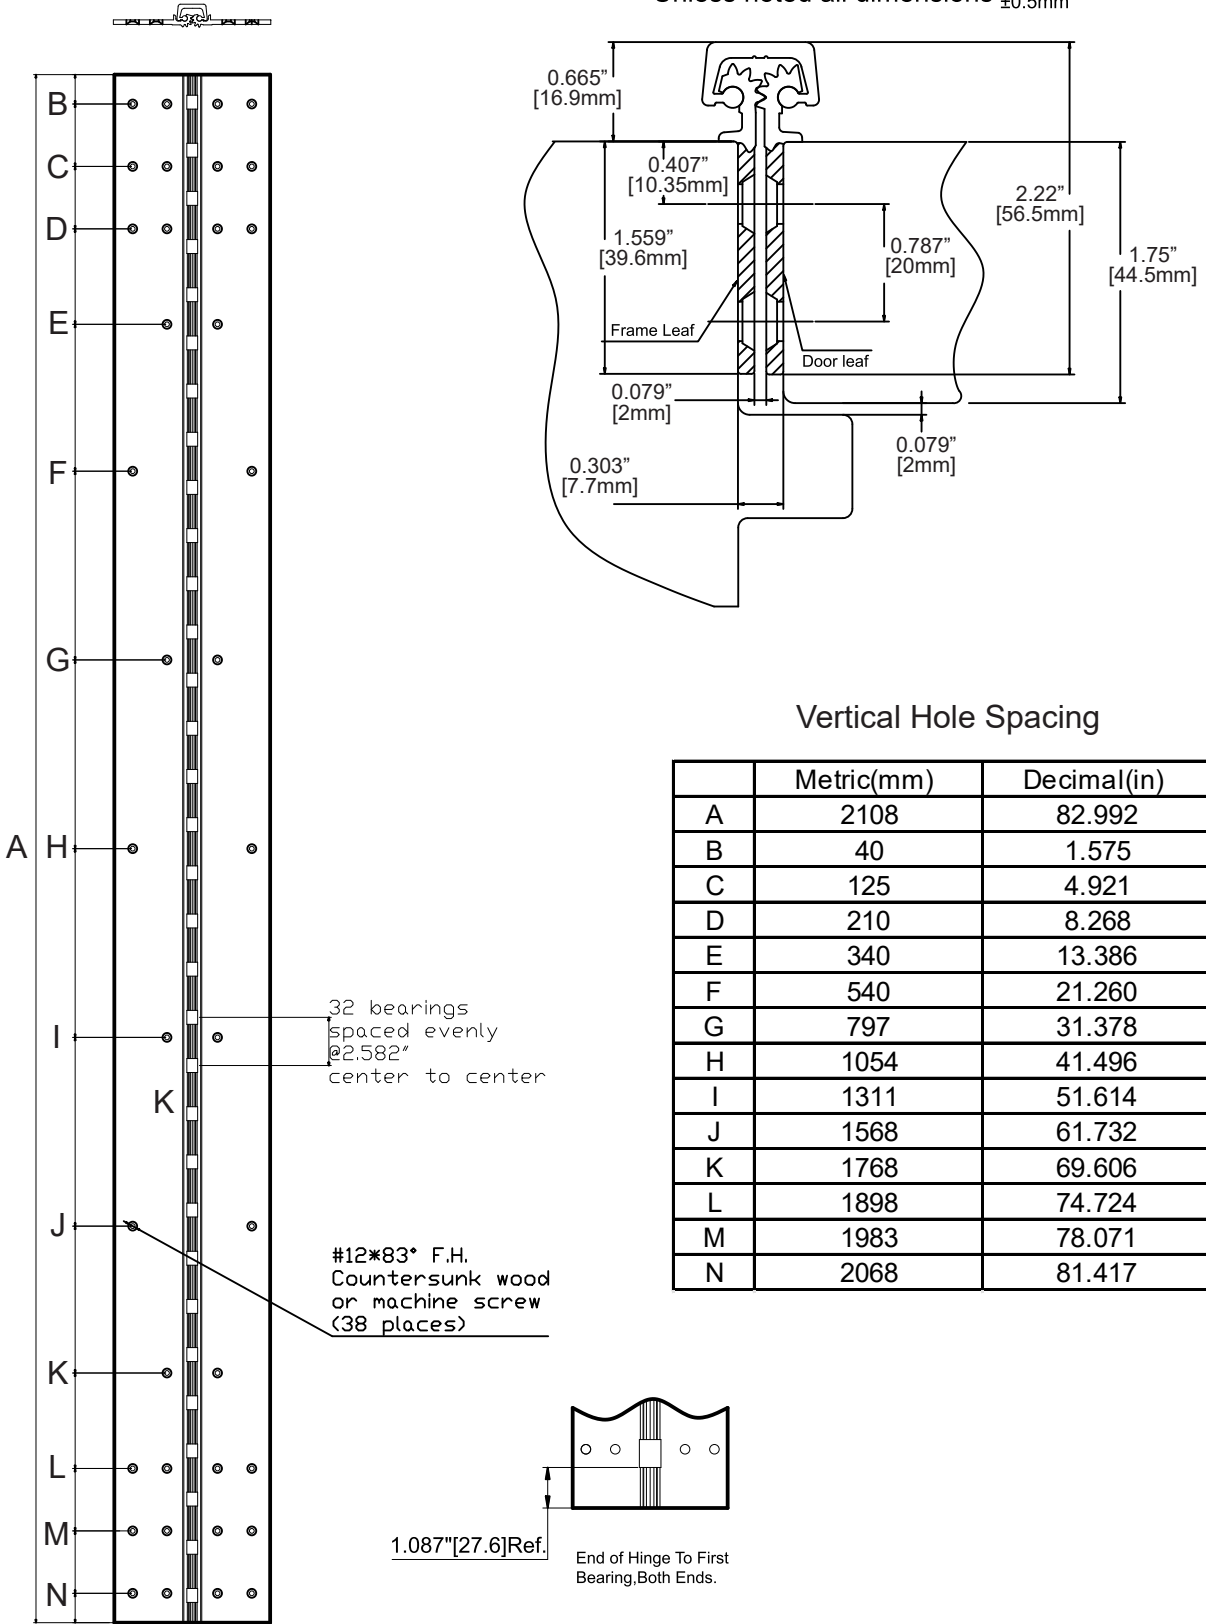



Vertical Hole Spacing

	Metric(mm)	Decimal(in)
A	2108	82.992
B	40	1.575
C	125	4.921
D	210	8.268
E	340	13.386
F	540	21.260
G	797	31.378
H	1054	41.496
I	1311	51.614
J	1568	61.732
K	1768	69.606
L	1898	74.724
M	1983	78.071
N	2068	81.417

**KROME**


ITEM NO:	DESCRIPTION:		SCALE:
HFM101	FULL CONCEALED MORTISE 83° HEAVY DUTY CONTINUOUS GEARED HINGE		NOT TO SCALE
ANSI:	UNIT:	VERSION:	DATE:
	inches[mm]	10183-1	04/02/24

Unless noted all dimensions  $\pm 0.020"$   
 $\pm 0.5mm$

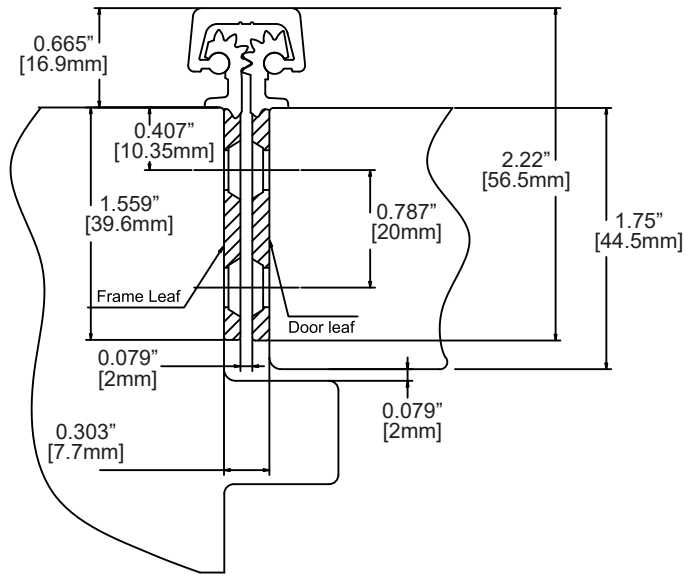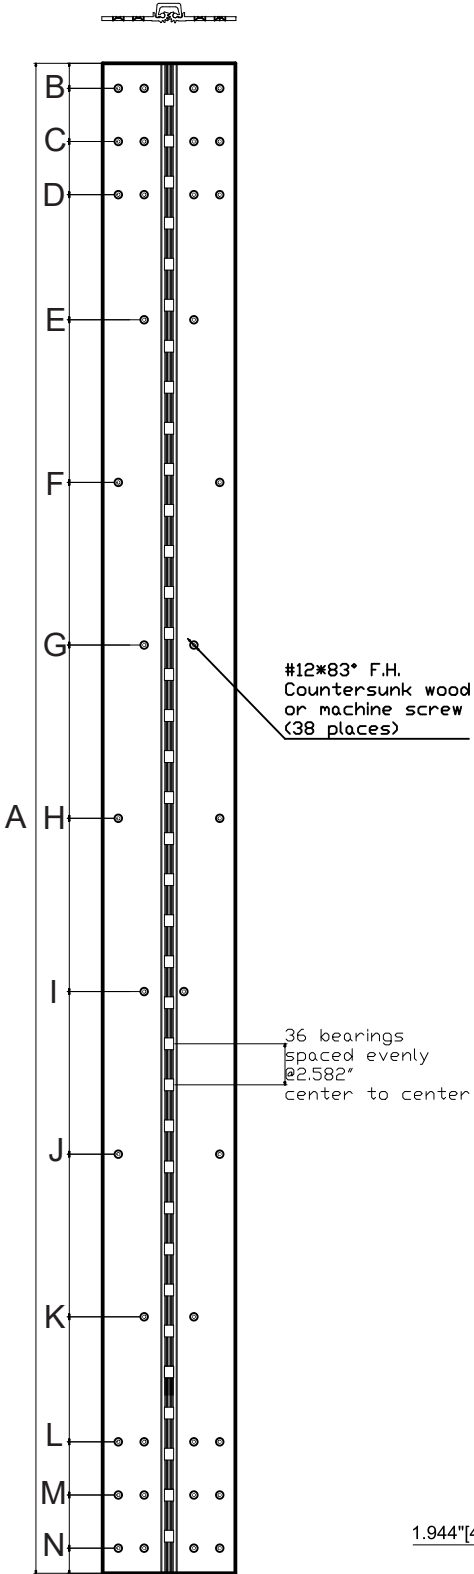

Vertical Hole Spacing


	Metric(mm)	Decimal(in)
A	2414	95.039
B	40	1.575
C	125	4.921
D	210	8.268
E	410	16.142
F	670	26.378
G	930	36.614
H	1207	47.52
I	1484	58.425
J	1744	68.661
K	2004	78.898
L	2204	86.772
M	2289	90.118
N	2374	93.465

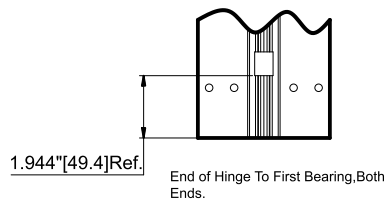

**KROME**

ITEM NO:	DESCRIPTION:		SCALE:
HFM101	FULL CONCEALED MORTISE 95° HEAVY DUTY CONTINUOUS GEARED HINGE		NOT TO SCALE
ANSI:	UNIT:	VERSION:	DATE:
	inches[mm]	10195-1	04/02/24

Unless noted all dimensions  $\pm 0.020"$   
 $\pm 0.5mm$

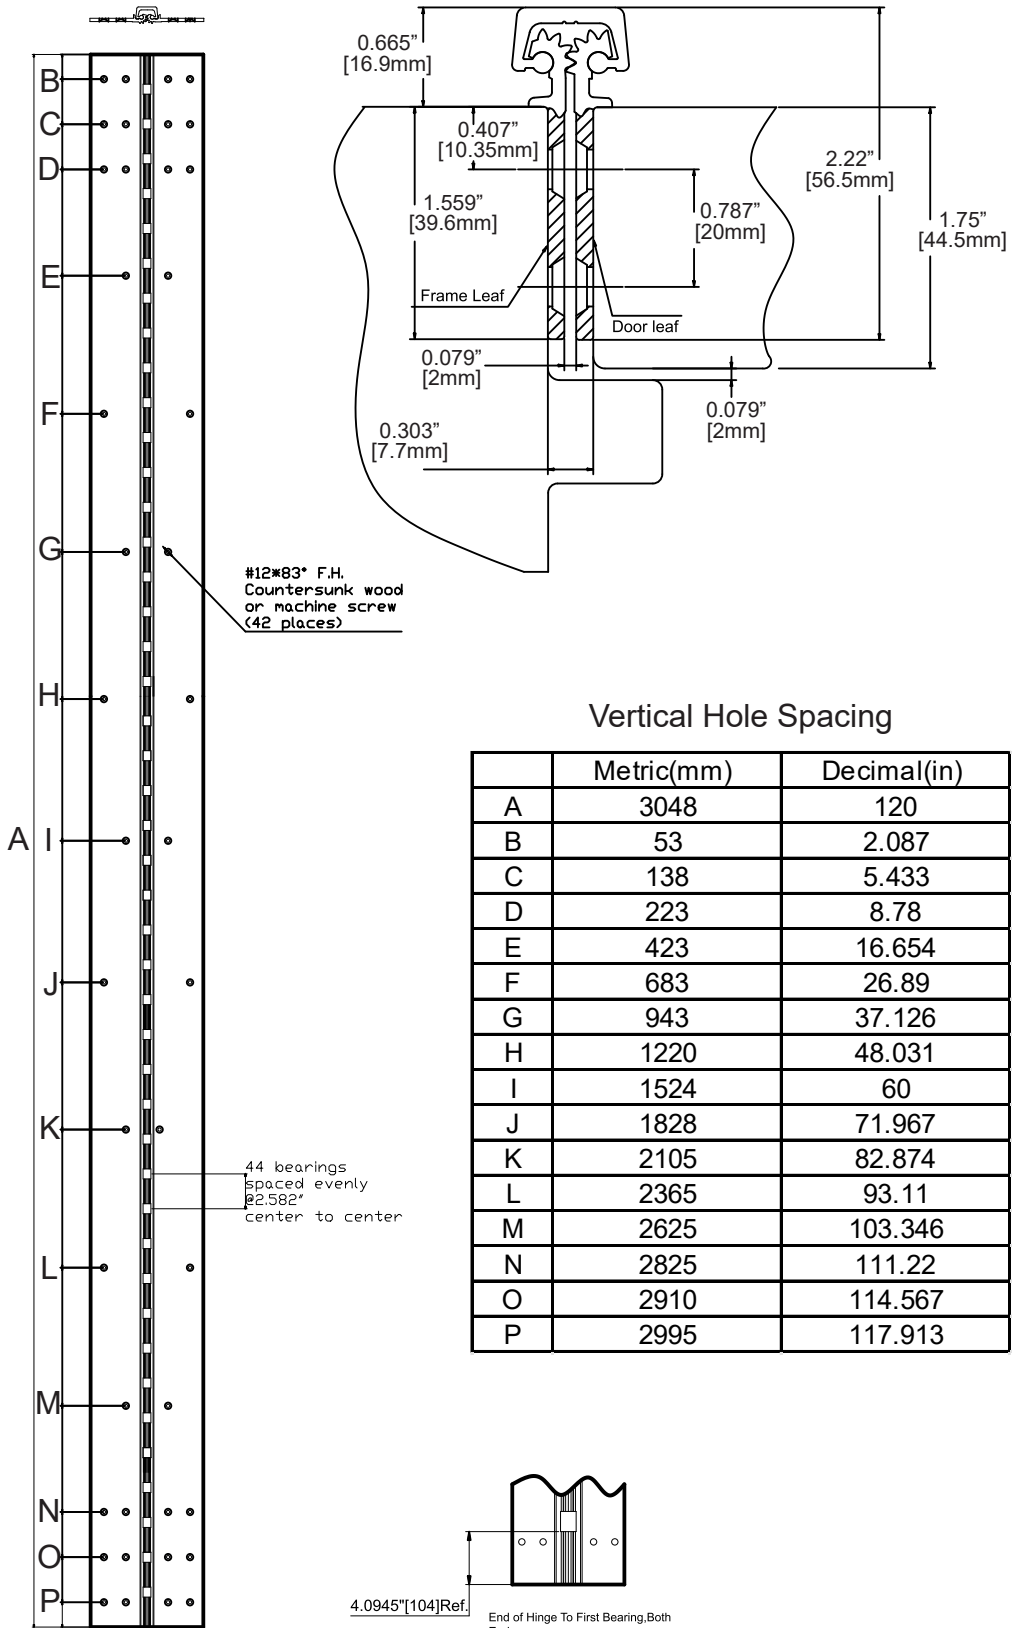

Vertical Hole Spacing

	Metric(mm)	Decimal(in)
A	3048	120
B	53	2.087
C	138	5.433
D	223	8.78
E	423	16.654
F	683	26.89
G	943	37.126
H	1220	48.031
I	1524	60
J	1828	71.967
K	2105	82.874
L	2365	93.11
M	2625	103.346
N	2825	111.22
O	2910	114.567
P	2995	117.913

#12x83" F.H.  
Countersunk wood  
or machine screw  
(42 places)

44 bearings  
spaced evenly  
@2.582"  
center to center

4.0945"[104]Ref

End of Hinge To First Bearing, Both  
Ends.

**KROME**

ITEM NO:	DESCRIPTION:		SCALE:
HFM101	FULL CONCEALED MORTISE 120° HEAVY DUTY CONTINUOUS GEARED HINGE		NOT TO SCALE
ANSI:	UNIT:	VERSION:	DATE:
	inches[mm]	101120-1	04/02/24