

GRADE 1 HEAVY DUTY KNOB LOCKSET

Universal Turn Button
or Push In & Turn Button

Meet ANSI hollow metal and wooden door cutout
1-3/8" (35MM) - 2" (52mm) door thickness
Door range indicator marked on cover

Wrought brass or bronze Ø 70 rose
Spin-on rose type flat design only

Wrought brass, bronze Ø 56 knob

Stainless Steel 17/32" (13.5mm) throw
deadlatch & spring latch
Reversible latch for flat & beveled door

UL Label
UL 3 Hour fire rated

Precision solid brass pin
tumbler cylinders with brass keys
Schlage "C" Keyway & SFIC available




SPECIFICATIONS

- **Certifications:**
 - ANSI/BHMA A156.2 Series 4000, Grade 1 strength, operational and 1,000,000 cycles requirements
 - UL/cUL Listed
 - UL 10C 3 hours fire rating
- **Door Thickness:** 1-5/8" (40mm) to 2" (52mm)
- **Backset:** 2-3/4" (70mm) standard, 2-3/8" (60mm) optional
- **Latch Front:** 1-1/8" (29mm) x 2-1/4" (57mm)
- **Latch Bolt:** Stainless Steel 17/32" (13.5mm) throw
- **Strike:** ANSI (ASA) curved lip strike standard.
- **Cylinder & Keys:** Precision solid brass pin tumbler cylinders with nickel silver brass 2 keys. Schlage "C" keyway
- **Small Format Interchangeable Core** available
- **Limited Warranty:** Seven-year Mechanical
- **Flexibility:**
 - Large selection of functions available
 - Easy to adjust the door thickness range by indicator

TECHNICAL DIMENSIONS


Knob Design:

Knob (B)

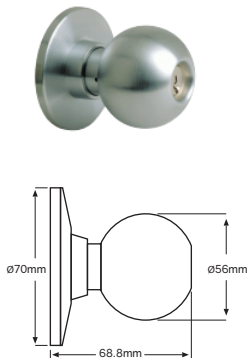


Rose Design:

Flat Rose (F)




Door Preparation:

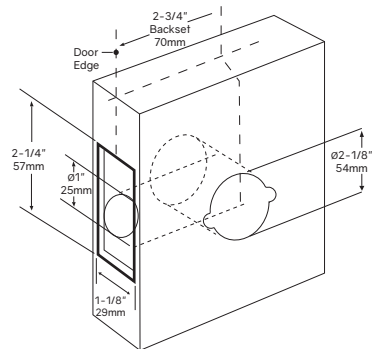

HOW TO ORDER

K R O M - 1 1 B F 5 3 C 2 6 D

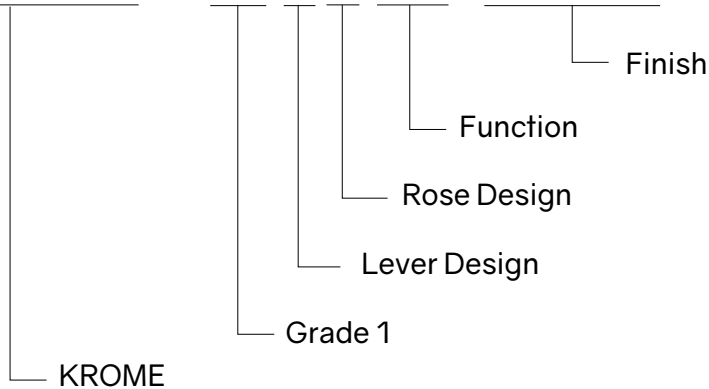

Item Number	Rose	Function	Finish
11B	Flat (F)	Passage (10) Privacy (40) Entry (53) Classroom (70) Classroom Double (72) Storeroom (80) Storeroom Double (82)	Satin Chrome (C26D)

Note: Default Schlage Keyway