


GRADE 3 DEADBOLT

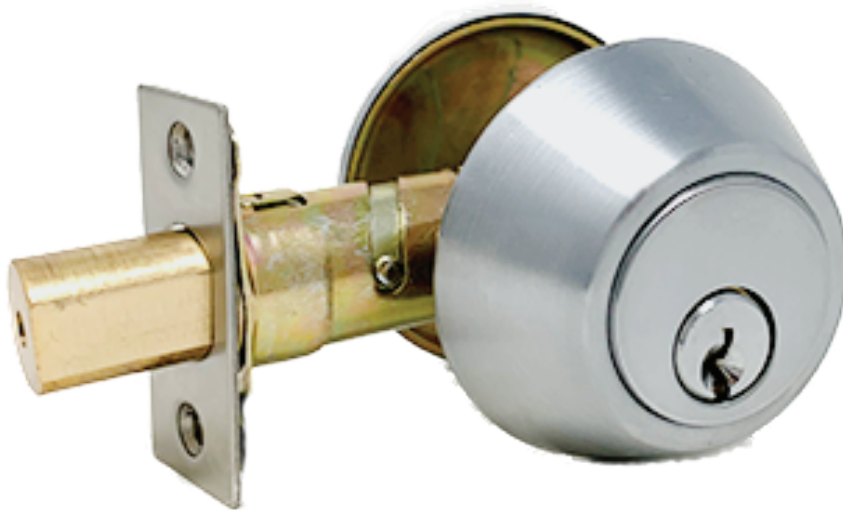

SPECIFICATIONS

Certifications

- Conforms to ANSI/BHMA Grade 3

Door Thickness

- 1-3/8" (35mm) to 1-3/4" (45mm)

Backset

- Adjustable 2-3/8" (60.3mm) or 2-3/4" (70mm)

Latch Front

- 1"x 2-1/4" (57mm) square or drive-in

Latch Bolt

- Solid Brass 1" (25.4mm) throw with hardened steel pin inserted

Strike:

- Deadbolt strike standard

Cylinder & Keys:

- Precision solid brass 5 pin
- Tumbler cylinders with nickel silver brass 2 keys.
- Weiser keyway


Limited Warranty:

- Five-year Mechanical


TECHNICAL DIMENSIONS

Function:

Single (51)

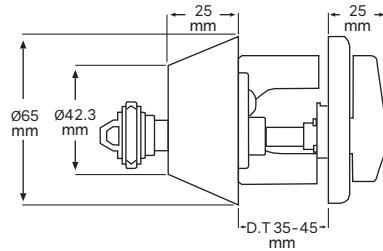


Door Preparation:

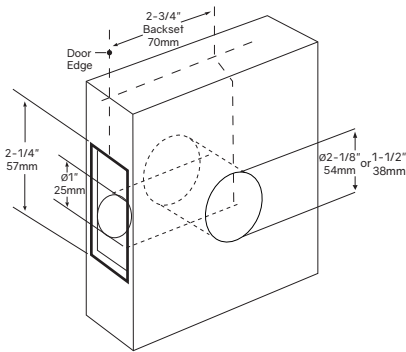

HOW TO ORDER

K R O M - 3 5 D B 5 1 C 2 6 D

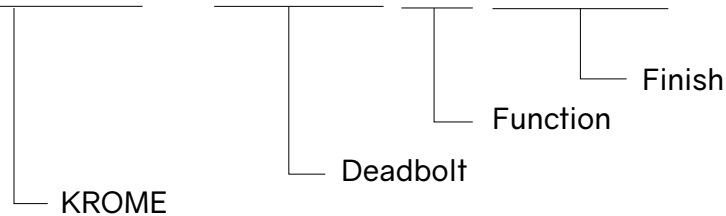

Item Number	Function	Finish	Option
35DB	Single (51)	Satin Chrome (C26D)	Weiser Keyway (WR)