


GRADE 2 DEADBOLT

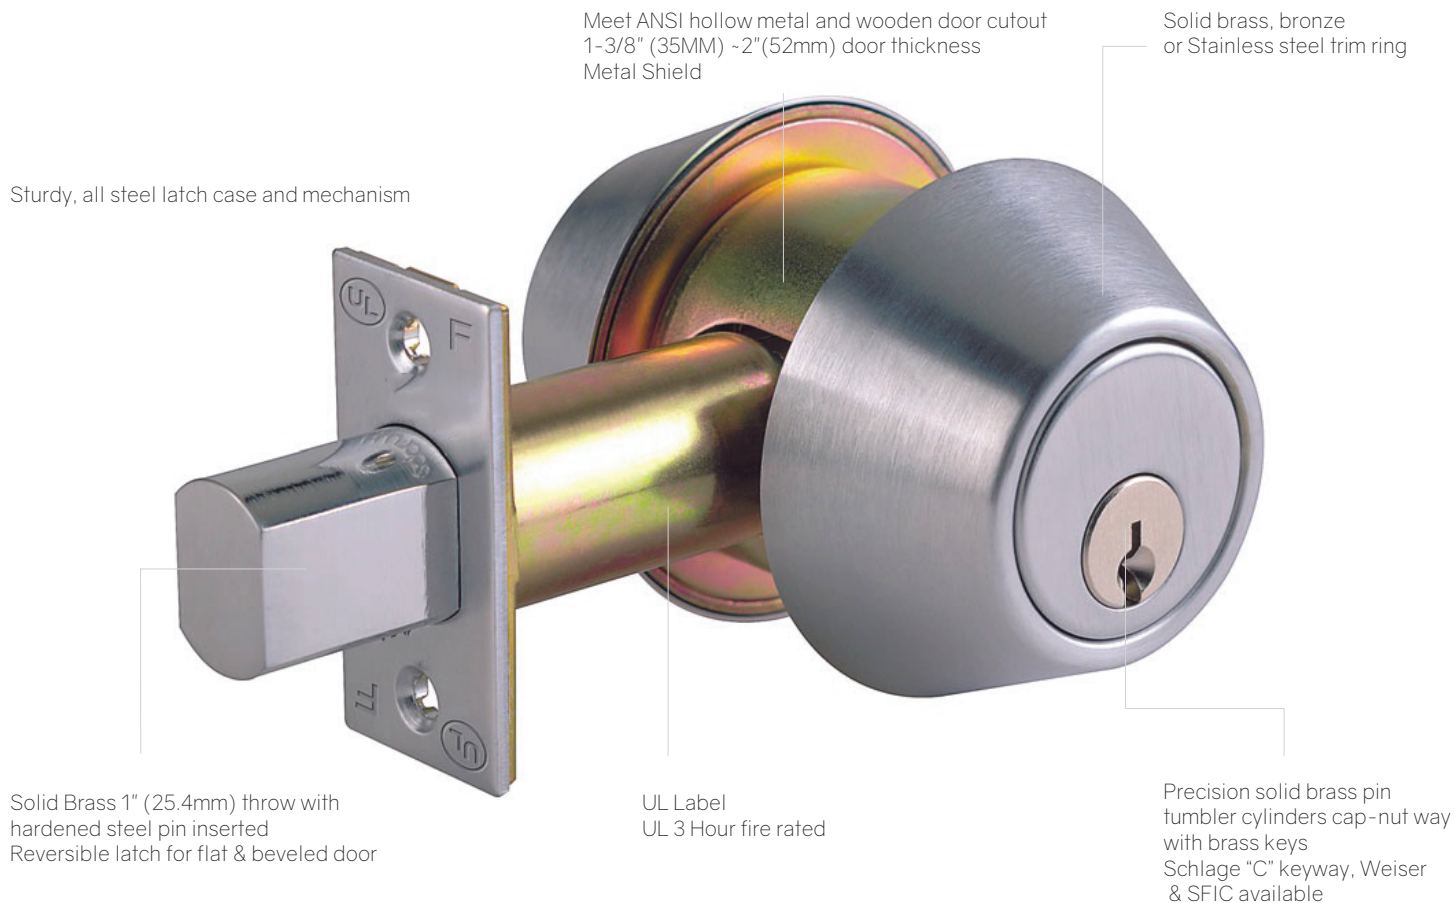


SPECIFICATIONS

- Certifications:
 - UL/cUL Listed
 - UL 10C 3 hours fire rating
- Door Thickness: 1-3/8" (35mm) to 1-3/4" (45mm)
- Backset: 2-3/4" (70mm) standard, 2-3/8" (60mm) optional
- Latch Front: 1-1/8" (29mm) x 2-1/4" (57mm) square
- Latch Bolt: Solid Brass 1" (25.4mm) throw with hardened steel pin inserted
- Strike: Deadbolt strike standard
- Cylinder & Keys: Precision solid brass pin tumbler cylinders with nickel silver brass 2 keys. Schlage "C" or Weiser keyway and SFIC available
- Limited Warranty: Five-year Mechanical


TECHNICAL DIMENSIONS

Function:


Single (51)

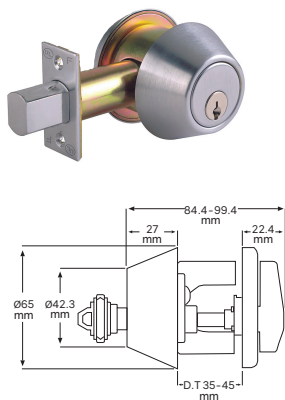

Double (60)

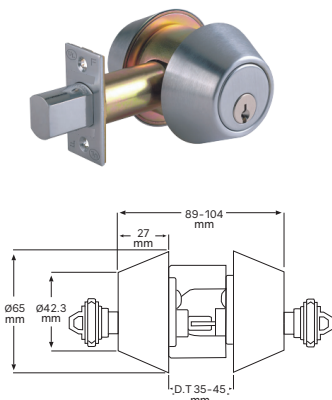


Door Preparation:

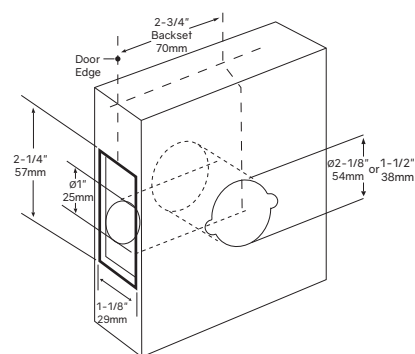

HOW TO ORDER

K R O M - 2 5 D B 5 1 C 2 6 D S F I C

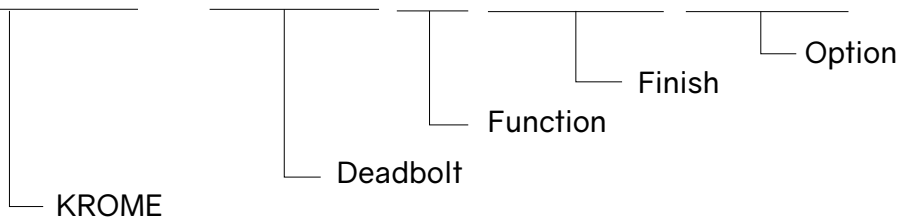

Item Number	Function	Finish	Option
25DB	Single (51)	Bright Brass (C3)	Schlage Keyway (Blank)
	Double (60)	Oil Rubbed Bronze (C10B)	Weiser Keyway (WR)
		Satin Nickel (C15)	Small Format
		Satin Chrome (C26D)	Interchangeable Core (SFIC)
		Matte Black (C19)	
Note: default Schlage keyway			