


GRADE 2 MEDIUM DUTY LEVER LOCKSET



ADA compliant

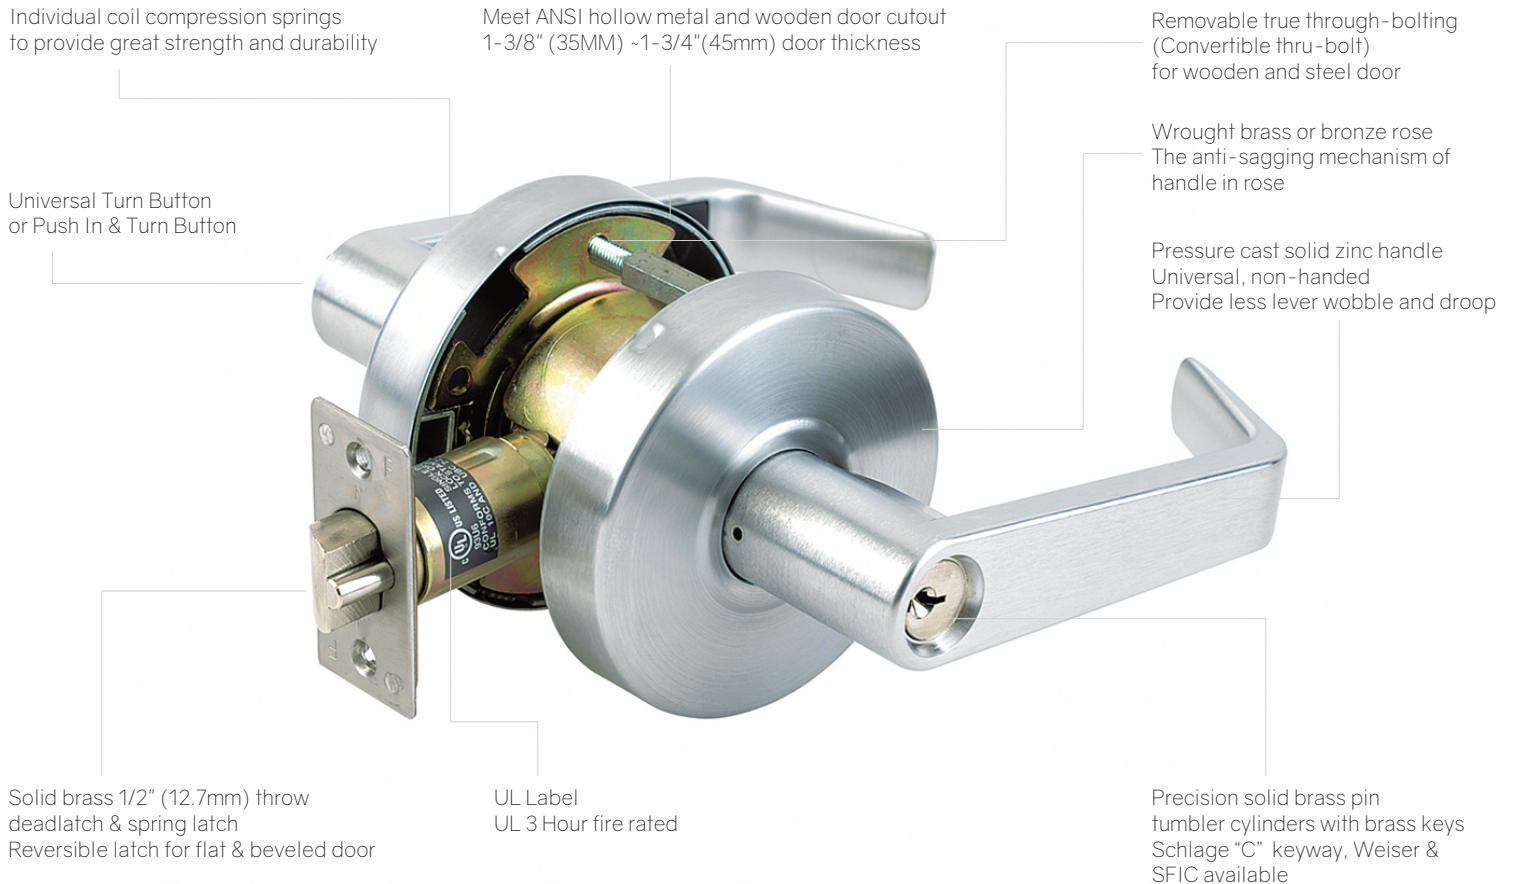


SPECIFICATIONS

- **Certifications:**
 - NSI/BHMA A156.2 Series 4000, Grade 2 strength, operational and 400,000 cycles requirements
 - UL/cUL Listed
 - UL 10C 3 hours fire rating
 - ADA compliant
- **Door Thickness:** 1-3/8" (35mm) to 1-3/4" (45mm)
- **Backset:** 2-3/4" (70mm) standard, 2-3/8" (60mm) optional, 3-3/4" (95mm) and 5" (127mm) available
- **Latch Front:** 1-1/8" (29mm) x 2-1/4" (57mm) standard, 1" (25mm) x 2-1/4" (57mm) optional, square or round corner, beveled, drive-in latch available
- **Latch Bolt:** Solid Brass 1/2" (12.7mm) throw
- **Strike:** ANSI (ASA) curved lip strike standard.
- **Cylinder & Keys:** Precision solid brass pin tumbler cylinders with nickel silver brass 2 keys. Schlage "C" keyway, Weiser and SFIC available
- **Small Format Interchangeable Core** available
- **Limited Warranty:** five-year Mechanical
- **Flexibility:**
 - Removable convertible post
 - Free wheeling mechanism
 - Various lever and rose designs
 - Large selection of functions and finishes available


TECHNICAL DIMENSIONS

Lever Designs:


Lever (L)

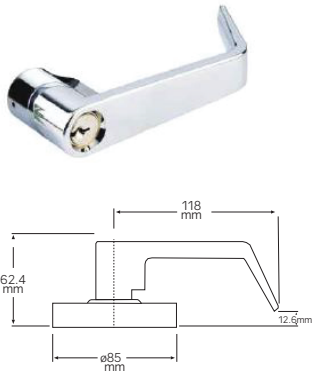

Lever (R)

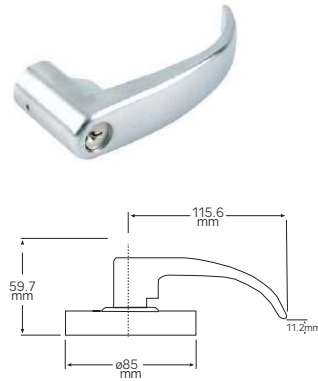


Lever (S)

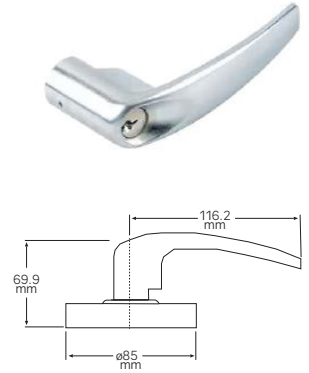


Rose Design:


Flat Rose (F)



Door Preperation:



HOW TO ORDER

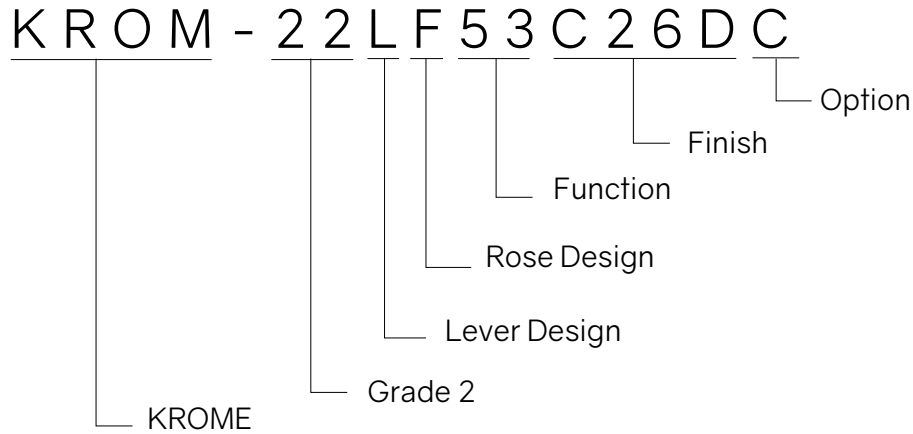

Item Number	Lever Design	Rose	Function	Finish	Option
22	L Shape (L) Round (R) Short (S)	Flat (F)	Dummy (00) Passage (10) Privacy (40) Entry (53) Classroom (70) Classroom Double (72) Storeroom (80) Storeroom Double (82)	Stain Chrome (C26D) Bright Brass (C3)	Weiser Keyway (WR) Schlage Keyway (Blank) Clutch (C) Small Format Interchangeable Core (SFIC)
Note: default Schlage keyway					