

GRADE 1 HEAVY DUTY KNOB LOCKSET

Universal Turn Button
or Push In & Turn Button

Meet ANSI hollow metal and wooden door cutout
1-3/8" (35MM) - 2" (52mm) door thickness
Door range indicator marked on cover

Wrought brass or bronze Ø 70 rose
Spin-on rose type flat design only

Wrought brass, bronze Ø 56 knob

Stainless Steel 17/32" (13.5mm) throw
deadlatch & spring latch
Reversible latch for flat & beveled door

UL Label
UL 3 Hour fire rated

Precision solid brass pin
tumbler cylinders with brass keys
Schlage "C" Keyway & SFIC available




SPECIFICATIONS

- **Certifications:**
 - ANSI/BHMA A156.2 Series 4000, Grade 1 strength, operational and 1,000,000 cycles requirements
 - UL/cUL Listed
 - UL 10C 3 hours fire rating
- **Door Thickness:** 1-5/8" (40mm) to 2" (52mm)
- **Backset:** 2-3/4" (70mm) standard, 2-3/8" (60mm) optional
- **Latch Front:** 1-1/8" (29mm) x 2-1/4" (57mm)
- **Latch Bolt:** Stainless Steel 17/32" (13.5mm) throw
- **Strike:** ANSI (ASA) curved lip strike standard.
- **Cylinder & Keys:** Precision solid brass pin tumbler cylinders with nickel silver brass 2 keys. Schlage "C" keyway and SFIC available
- **Small Format Interchangeable Core** available
- **Limited Warranty:** Seven-year Mechanical
- **Flexibility:**
 - Large selection of functions available
 - Easy to adjust the door thickness range by indicator

TECHNICAL DIMENSIONS


Knob Design:

Knob (B)

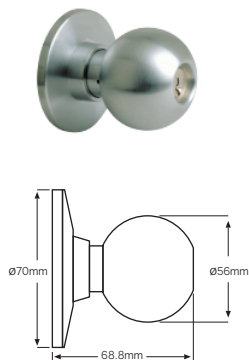


Rose Design:

Flat Rose (F)




Door Preparation:

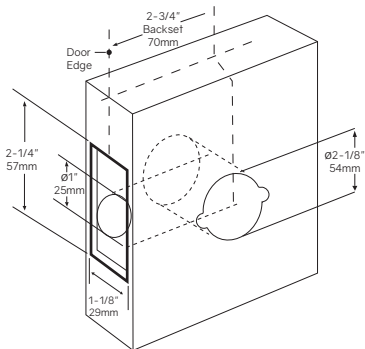

HOW TO ORDER

K R O M - 1 1 B F 5 3 C 2 6 D S F I C

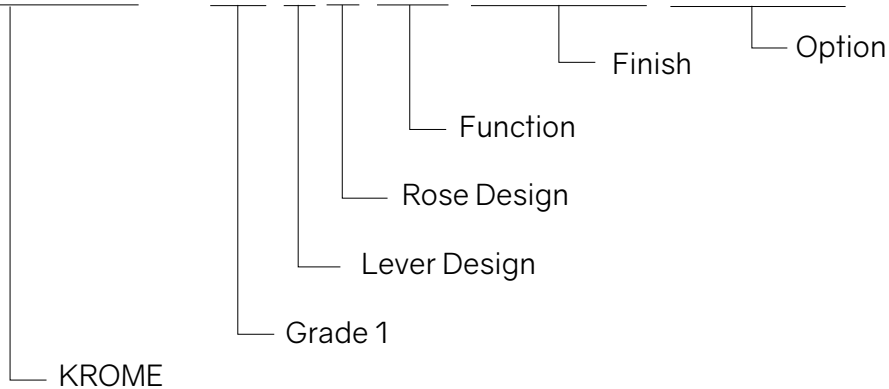

Item Number	Rose	Function	Finish	Option
11B	Flat (F)	Passage (10) Privacy (40) Entry (53) Classroom (70) Classroom Double (72) Storeroom (80) Storeroom Double (82)	Satin Chrome (C26D)	Small Format Interchangeable Core (SFIC)

Note: Default Schlage Keyway