




GRADE 2 CROSS BAR EXIT DEVICE

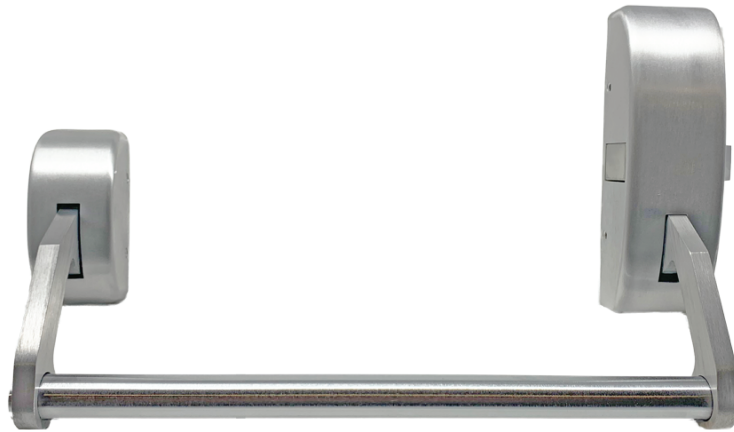

SPECIFICATIONS

- Certification:
 - ANSI/BHMA A156.3 Grade 2
 - cULus Listed for panic hardware
- Size: Field adjustable, 38" bar included
- Backset: 2-3/4" (70mm)
- Latchbolt: brass with 3/4" (19.1mm) throw
- Application trims included
- Stainless steel springs
- Dogging: Dogging by hex key
- Finish: Aluminum
- Limited warranty: 1 year

TECHNICAL DIMENSIONS

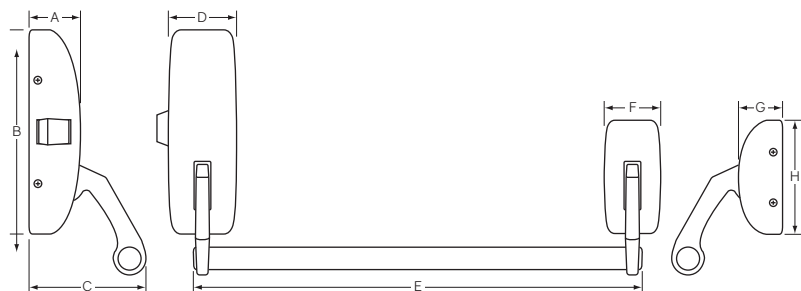

Dimensions

A.	2-1/8" (54 mm)
B.	8-1/2" (216 mm)
C.	4-3/4" (121mm)
D.	2-11/16" (68 mm)
E.	38" (965mm)
F.	2-3/16" (55 mm)
G.	2" (51mm)
H.	4-5/8" (117 mm)
I.	16" (406mm)

Dimensions

A.	3-1/2" (89mm)
B.	7-1/2" (190mm)
C.	2-1/16" (52mm)

HOW TO ORDER

KROM-855C28

The diagram illustrates the KROME architecture hierarchy. It starts with 'KROME' at the bottom left. A vertical line extends upwards from 'KROME', and a horizontal line branches off to the right, labeled 'Cross bar'. From the top of the vertical line, another horizontal line branches off to the right, labeled 'Function'. From the top of the 'Function' line, a final horizontal line branches off to the right, labeled 'Finish'.

Item Number	Function	Finish
85	Exit only (1) Nightlatch (4) Thumbpiece (5)	Aluminum (C28)

Notes: Trim included with nighlatch and thumpiece functions.