

GRADE 2 MEDIUM DUTY KNOB LOCKSET

Universal Turn Button
or Push In & Turn Button

Meet ANSI hollow metal and wooden door cutout
1-3/8" (35MM) - 1-3/4" (45mm) door thickness
up to 2-1/4" (57mm) optional

Wrought brass or bronze rose
Ø 75 Spring-clip-on rose standard,
Ø 65, spin-pn rose available

Wrought brass, bronze or stainless
steel Ø 54 knob
Universal, non-handed

Solid brass 1/2" (12.7mm) throw
deadlatch & spring latch
Reversible latch for flat & beveled door

UL Label
UL 3 Hour fire rated

Precision solid brass pin
tumbler cylinders with brass keys
Schlage "C" keyway, Weiser &
SFIC available




SPECIFICATIONS

- **Certifications:**
 - NSI/BHMA A156.2 Series 4000, Grade 2 strength, operational and 400,000 cycles requirements
 - UL/cUL Listed
 - UL 10C 3 hours fire rating
- **Door Thickness:** 1-3/8" (35mm) to 1-3/4" (45mm)
- **Backset:** 2-3/4" (70mm) standard, 2-3/8" (60mm) optional, 3-3/4" (95mm) and 5" (127mm) available
- **Latch Front:** 1-1/8" (29mm) x 2-1/4" (57mm) standard, 1" (25mm) x 2-1/4" (57mm) optional, square or round corner, beveled, drive-in latch available
- **Latch Bolt:** Solid Brass 1/2" (12.7mm) throw
- **Strike:** ANSI (ASA) curved lip strike standard. SS or Steel material
- **Cylinder & Keys:** Precision solid brass pin tumbler cylinders with nickel silver brass 2 keys. Schlage "C" keyway, Weiser and SFIC available
- **Limited Warranty:** five-year Mechanical
- **Flexibility:**
 - 2 types of rose designs
 - Large selection of functions and finishes available

TECHNICAL DIMENSIONS


Knob Design:

Knob (B)




Rose Design:


Flat Rose (F)



Rose R (Round)

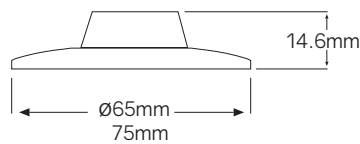

Door Preparation:

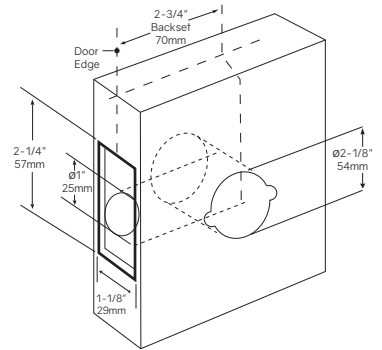

HOW TO ORDER

K R O M - 2 2 B F 5 3 C 3 2 D S F I C

KROME
 Grade 2
 Knob Design
 Rose Design
 Function
 Finish
 Option

Item Number	Rose	Function	Finish	Option
22B	Flat (F) Round (R)	Passage (10) Privacy (40) Entry (53) Classroom (70) Classroom Double (72) Storeroom (80) Storeroom Double (82)	Stainless Steel (C32D) Bright Brass (C3)	Weiser Keyway (WR) Schlage Keyway (Blank) Small Format Interchangeable Core (SFIC)

Note: Default Schlage Keyway