
KROME LOCKS

GRADE 2 MEDIUM DUTY LEVER LOCKSET



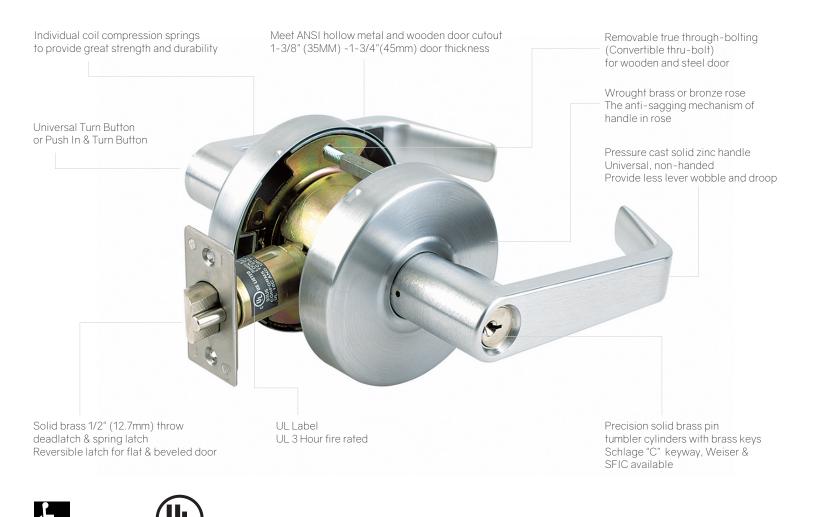

ADA compliant 🕻

SPECIFICATIONS

- Certifications:
- NSI/BHMA A156.2 Series 4000, Grade 2 strength, operational and 400,000 cycles requirements
- UL/cUL Listed
- UL 10C 3 hours fire rating
- ADA compliant
- Door Thickness: 1-3/8" (35mm) to 1-3/4" (45mm)
- Backset: 2-3/4" (70mm) standard, 2-3/8" (60mm) optional, 3-3/4" (95mm) and 5" (127mm) available
- Latch Front: 1-1/8" (29mm) x 2-1/4" (57mm) standard, 1"(25mm) x 2-1/4" (57mm) optional, square or round corner, beveled, drive-in latch available
- Latch Bolt: Solid Brass 1/2" (12.7mm) throw

- Strike: ANSI (ASA) curved lip strike standard.
- Cylinder & Keys: Precision solid brass pin tumbler cylinders with nickel silver brass 2 keys. Schlage "C" keyway, Weiser and SFIC available
- Small Format Interchangeable Core available
- · Limited Warranty: five-year Mechanical
- Flexibility:
- Removable convertible post
- Free wheeling mechanism
- Various lever and rose designs
- Large selection of functions and finishes available


KROME

CYLINDRICAL LEVER LOCK


TECHNICAL DIMENSIONS

Lever Designs:















Rose Design:

Flat Rose (F)

Door Preperation:




KROMEHARDWARE.COM

KROME

CYLINDRICAL LEVER LOCK

HOW TO ORDER

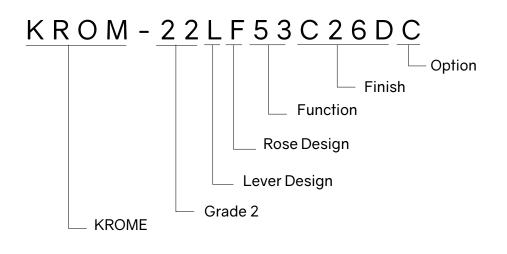

Item Number	Lever Design	Rose	Function	Finish	Option
22	L Shape (L)	Flat (F)	Dummy (00)	Stain Chrome (C26D)	Weiser Keyway (WR)
	Round (R)		Passage (10)	Bright Brass (C3)	Schlage Keyway (Blank)
	Short (S)		Privacy (40)		Clutch (C)
			Entry (53)		Small Format
			Classroom (70)		Interchangeable Core (SFIC)
			Classroom Double (72)		
			Storeroom (80)		
			Storeroom Double (82)		
22	L Shape (L)		Dummy (00)	Black (C19)	Weiser Keyway (WR)
	Short (S)		Passage (10)		Schlage Keyway (Blank)
			Privacy (40)		Clutch (C)
			Entry (53)		Small Format
			Classroom (70)		Interchangeable Core (SFIC)
			Storeroom (80)		
Note: default Schlage keyway					

KROMEHARDWARE.COM